

club^{3D}

SenseVision DisplayPort™ Video Splitter



senseVISION
CONNECT AND DO MORE



SenseVision DisplayPort™ Video Splitter

USER INSTRUCTIONS

DisplayPort™ to 2x HDMI™

CSV - 6200H



SenseVision DisplayPort™ Video Splitter

CSV-6200H
DisplayPort™ to
2x HDMI™ 1.4

senseVISION
CONNECT AND DO MORE



Dual Monitor up to
2560X1600p @ 60Hz



SenseVision DisplayPort™ Video Splitter

- Compliant with: DisplayPort™ v1.2a, DisplayPort™ v1.1a, VESA DDM Standard, HDCP V2.0, DisplayId, and EDID V1.4
- Supports main link rates of 5.4Gbps (HBR2), 2.7Gbps (HBR) and 1.62Gbps (RBR) from source
- Supports HDMI™ 1.4 specifications for the 2 outputs.
- Input pixel data depth 6/8/10/12 bits and supports output pixel format RGB444
- Supports Advanced Wide Eye™ SerDes technology enables high jitter performance
- Supports AMD Eyefinity™
- Compatible with Microsoft Surface Pro and Intel NUC platforms
- Works with AMD, Nvidia and Intel Graphics solutions






Step 1

senseVISION
CONNECT AND DO MORE

DisplayPort™ video splitter/ MST, your laptop,
HDMI™ cables and two screens



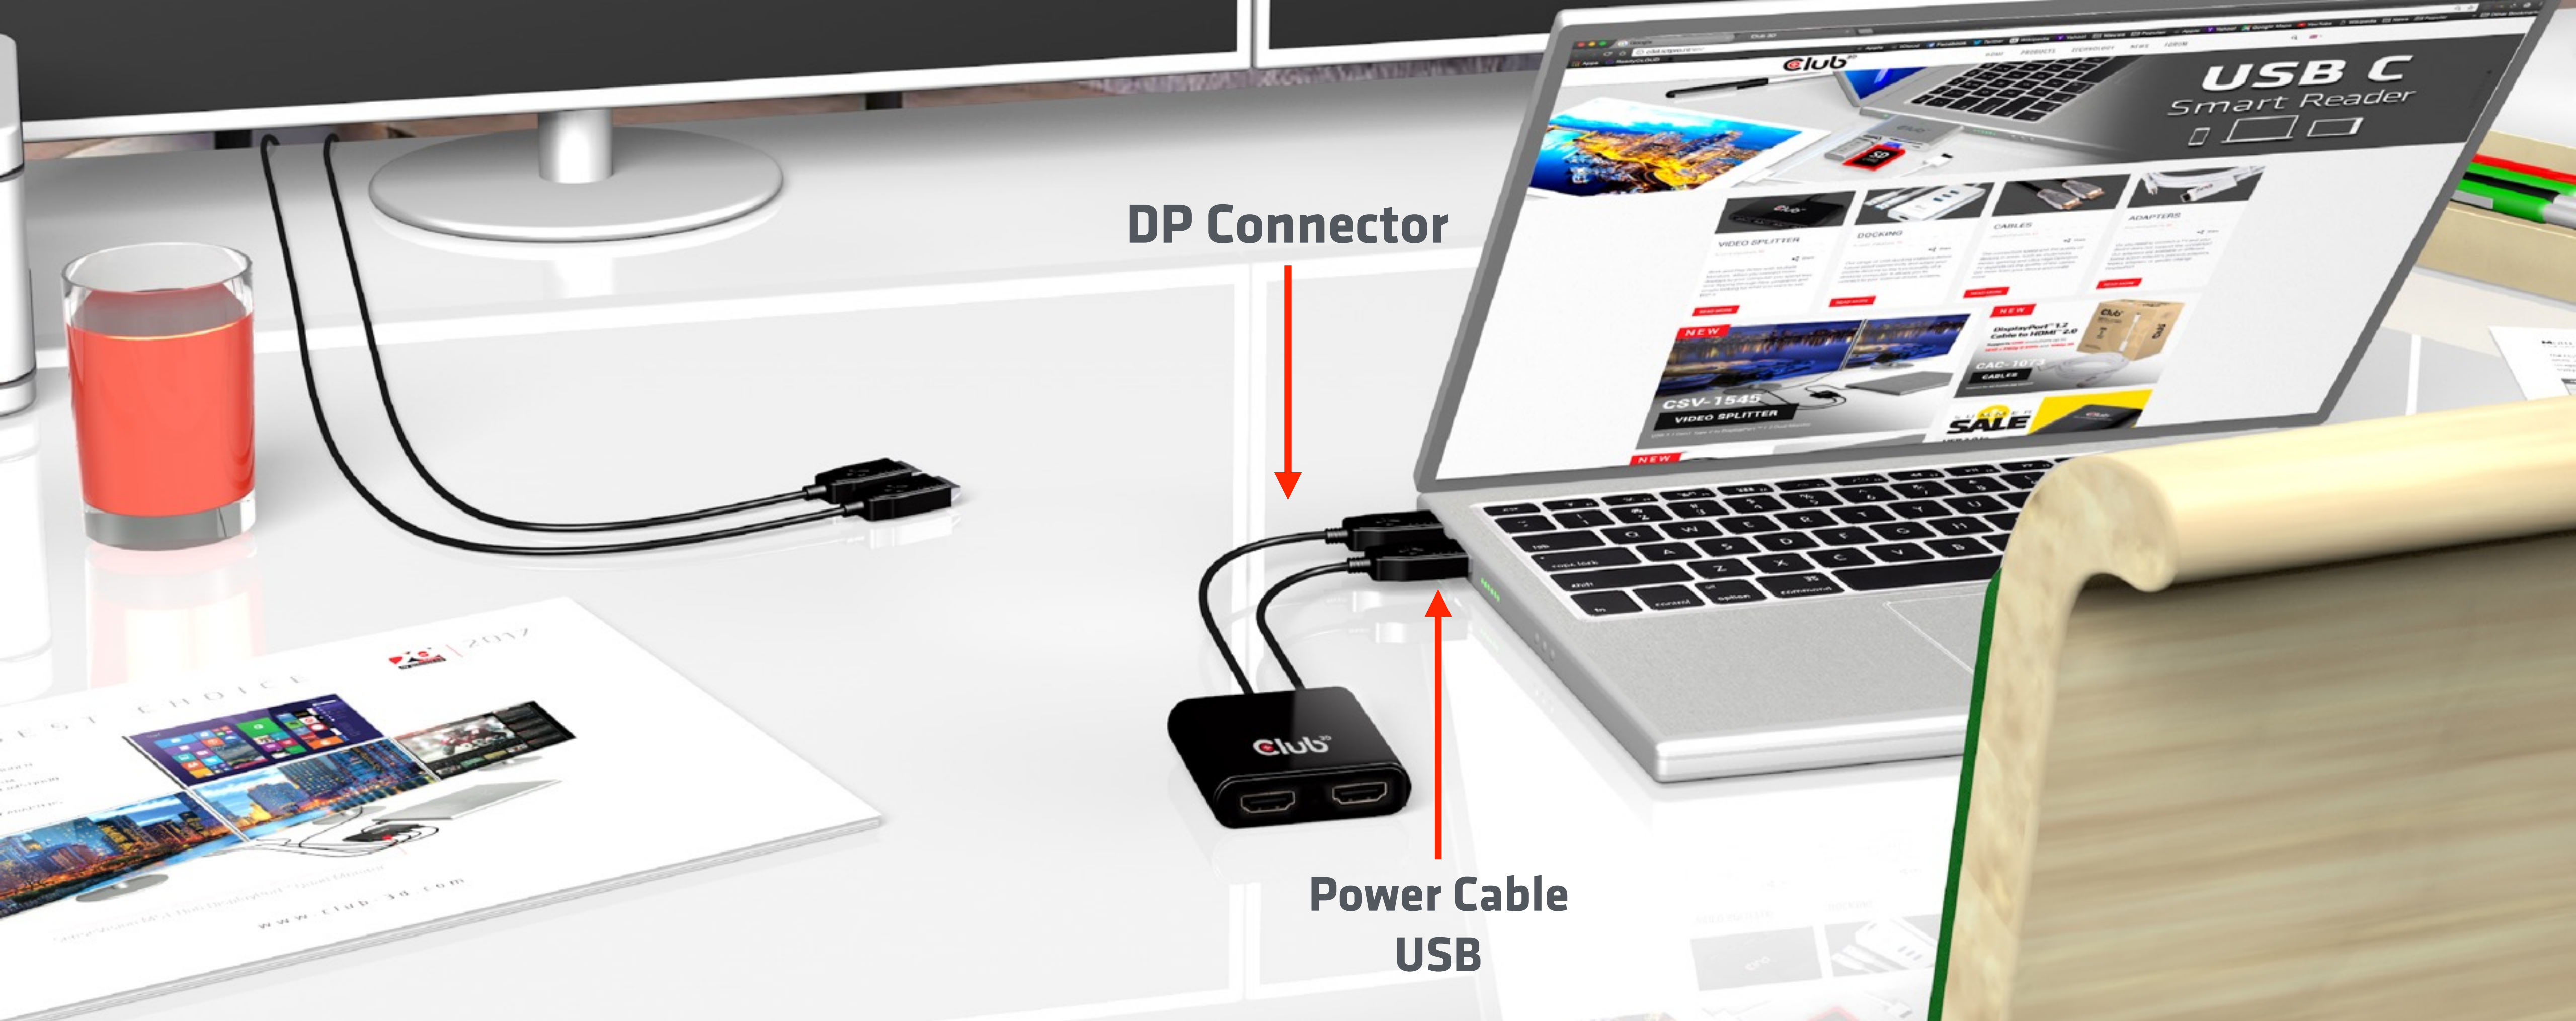

DP Connector

**Power Cable
USB**

Step 2



Connect your video splitter /MST via the DP to your laptop and if needed the USB plug for power





HDMI™
cables

Step 3



Connect your video splitter/MST to
your HDMI™ cables

In Extended Desktop Mode

You can use Club3D cables: CAC-1310 or CAC-1311



Lean back and enjoy



Step 4

senseVISION
CONNECT AND DO MORE

**This video splitter/ MST hub supports 2 screens
up to: 2560X1600p @ 60Hz quality**

In Mirror Desktop Mode



senseVISION



CONNECT
AND DO MORE

Club 3D



CONNECT
AND DO MORE

Thanks for watching