

Thank you for purchasing our CAC-1918. After unpacking the product, please make sure you have all the items provided and checked for any damages. In case of any missing damaged parts please inform your supplier immediately.

You should have:

- CAC-1918 Travel Charger 240 Watt GaN technology, Four port USB Type-C, Power Delivery(PD) 3.1 and PPS Support
- Supporting bridge(to position the unit upright)
- USB Type-C EPR 5A cable RED (Power ONLY) 1 m / 3.28 ft)
- Power cable(1.5 m / 4.92 ft) Please specify plug when ordering



In this document you can find:

- Operation procedures
- Operation Notes
- Measurements
- Port capabilities
- Notes
- Features

The Club 3D CAC-1918 Travel Charger 240 Watt GaN technology, Four port USB Type-C, Power Delivery(PD) 3.1 and PPS Support is a high-performance and fashionable design travel charger. Versatility: Perfect solution for business travelers and power users needs and multiple ports. This means you only need one charger for all your modern devices, and you don't have to worry about carrying multiple adapters. Portability: Highly portable and easy to carry (535 gr / 18.87 oz) in a backpack or luggage, making it ideal for business travelers who need to stay connected on the go without being weighed down by bulky chargers. Powerful charging: The 240 Watt charger charges multiple devices simultaneously at high speed, while improving the life of your batteries at the same time. Ensuring busy travelers can stay productive on the move without waiting around for hours. Built-in safeguards protect your devices against excessive current, overcharging and overheating(OCP-OTP-SCP-OVP). The unit comes with a supporting bridge to position the unit upright.



Operation procedures

- Plug the AC connector of power adapter into the interface of the power station; then plug the other connector of power adapter into socket.
- Plug one USB connector of the cable into the interface of the charger and plug the other connector of the cable into the electronic device (iPhone and other smart phones, tablet, PC, etc)
- Please pull the USB connector out after the electronic equipment's fully charged.

Operation Notes

- For optimum performance, please use the power station according to the user manual.
- Please plug the power adapter into socket whose voltage range should be 100~240VAC.
- Please unplug the power adapter after using.

Single Port :
 C1/C2/C3/C4: 5V3A 9V3A 5V5A 20V5A 28V5A
 Total: 140W MAX
 (PPS: 5V-11V5A 45W MAX)

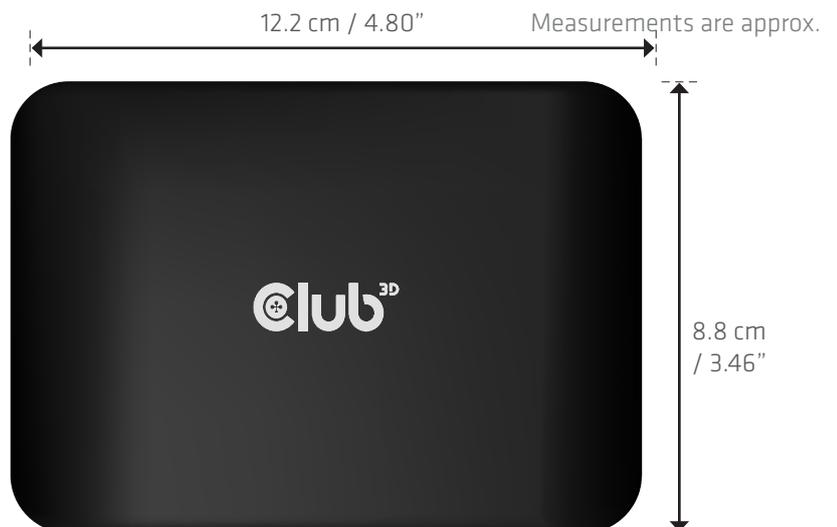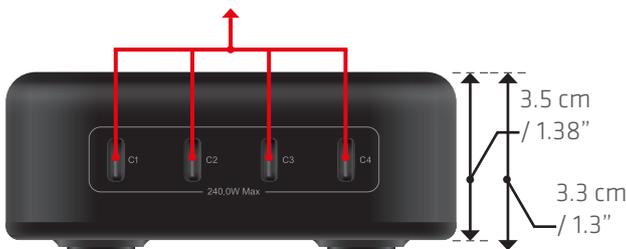

Warning Safe Usage: Only to be used at altitude 2000 meters/6562 feet and below.

Disclaimer: While we endeavour to provide the most accurate, up-to-date information available, the content on this document may be out of date or include omissions, inaccuracies or other errors. Products might obtain a certification during their lifetime. This doesn't change or alter the product specifications and/or performance in any way. Club 3D will provide the updated information on their website www.club-3d.com at her discretion. Therefore Club 3D does not accept any rights claimed on the content of this document. Please refer to a full overview of our Legacy Terms and Conditions on www.club-3d.com. All other brand names are trademarks or registered trademarks and are the property of their respective owners. All content is subject to change without prior notice.

Notes

- Our products have protection functions and the two tips above are suggestions just for safety.
- Do not use the power station with an electronic product which is not in conformity with the specifications, so as to avoid any problems caused by specification mismatching.
- It's normal that power adapter and power station will be a little overheated in the use process.
- When the power station stops working under over-current, over-temperature or short-circuit protection, please unplug the device after it automatically returns to work, then you need to check whether the device is compatible with this charger.
- Do not let the power station close to fire, such as stove, candles and etc.
- Do not let the power station soak into liquid, such as swimming pool, bathtub, etc.
- Do not wash the power station with corrosive cleaner.
- If the power station cannot work properly, please contact the store or distributor in your area.

Features

- Internal chip allows the 100-240VAC of input voltage.

Four USB Type-C connectors for outputs:

Single-port:

- C1/C2/C3/C4: 5V3A 9V3A 5V5A 20V5A 28V5A Total: 140W MAX (PPS: 5V-11V5A 45W MAX)

Dual-port:

- C1+C2 / C3+C4: 100W + 40W / 40W + 100W / 70W + 70W Total: 140W MAX
- 70W/100W (PPS: 5V-11V5A 45W MAX)
- 40W (PPS: 5V-11V3A 30W MAX)
- C1+C3 / C1+C4 / C2+C3 / C2+C4: 140W + 100W Total: 240W MAX
- 100W/140W (PPS: 5V-11V5A 45W MAX)

Three-port:

- C1+C2 + C3 / C1+C2 + C4: 70W + 70W + 100W / 100W + 40W + 100W / 40W + 100W + 100W Total: 240W MAX
- 70W/100W (PPS: 5V-11V5A 45W MAX)
- 40W (PPS: 5V-11V3A 30W MAX)
- C2+C3 + C4 / C1+C3 + C4: 140W + 60W + 40W / 140W + 40W + 60W / 140W + 50W + 50W Total: 240W MAX
- 140W (PPS: 5V-11V5A 45W MAX)
- 40W/50W/60W (PPS: 5V-11V3A 30W MAX)

All-port:

- C1+C2+C3+C4: 100W + 40W + 60W + 40W / 100W + 40W + 40W + 60W / 100W + 40W + 50W + 50W / 70W + 70W + 50W + 50W / 70W + 70W + 60W + 40W / 70W + 70W + 40W + 60W / 40W + 100W + 40W + 60W / 40W + 100W + 60W + 40W / 40W + 100W + 50W + 50W Total: 240W MAX
- 70W/100W (PPS: 5V-11V5A 45W MAX)
- 40W/50W/60W (PPS: 5V-11V3A 30W MAX)
- Total: 240W MAX

