

**Thank you for purchasing our CSV-1568 Product.**

After unpacking the product, please make sure you have all the items provided and checked for any damages. In case of any missing/damaged parts please inform your supplier immediately.

**You should have:**

- CSV-1568 Docking Station
- PowerSupply, Input: 100-110/240VAC. Output: up to 120W
- 1x USB Type-C cable connection to Host 1m / 3.28ft
- Detachable stand
- Quick Install Guide




**Please make sure:**

Your Host System has the latest drivers updates, and is connected to the external power supply.

**Note:**

1. This dock will not work without external power supply
2. After connecting to the host, the product and the white light will turn on by default. Press the power button, the product and the white light will be turn off. The keystroke interval should be greater than 2 seconds.
3. To achieve the above max resolution of each port, the connected host should support DP1.4 Alt mode. The above resolution will be decreased if the host only support DP1.2 due to bandwidth limitation.
4. The above resolution combination is for reference, the actual video output resolution depends on the connected host and displays.
  - Designed for DP 1.4 Alternate Mode supported Type C and Thunderbolt 3 Hosts (PC, Laptop, Mobile Phones etc).
  - Supports Output through MST up to 3 displays (2 HDMI + VGA or 2 HDMI + DP). DP and VGA are alternate (DP is has priority over VGA).

**How to connect:**

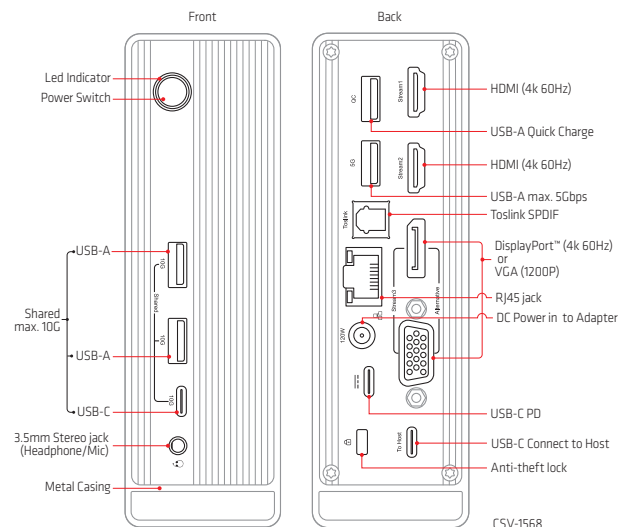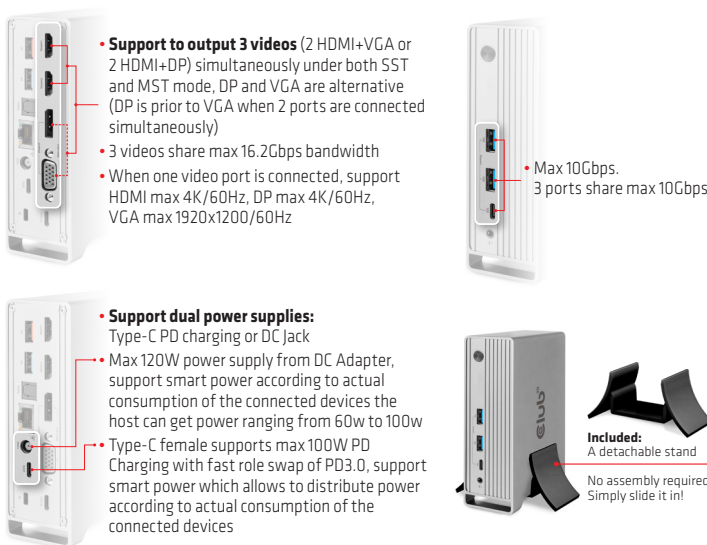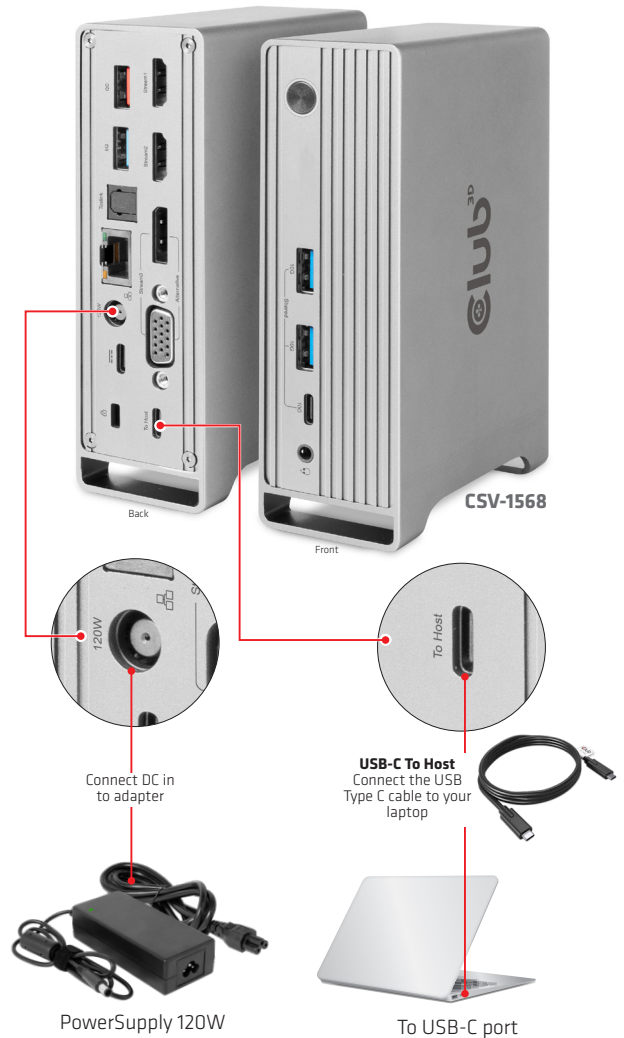

Warning Safe Usage: Only to be used at altitude 2000 meters/6562 feet and below



For any Questions please check our forum section on our website [www.club-3d.com](http://www.club-3d.com)