

CSV-1580 QUICK INSTALLATION GUIDE

Thunderbolt™ 4 portable 5-in-1 hub with Smart Power

Thank you for purchasing our CSV-1580 Product. After unpacking the product, please make sure you have all the items provided and checked for any damages. In case of any missing/damaged parts please inform your supplier immediately.

You should have:



- CSV-1580 Thunderbolt™ 4 Portable 5-in-1 Hub with Smart Power
- Power Adapter output 20V/5A
- CAC-1571, USB4™ Type-C Gen3x2 Bi-Directional Cable 40Gbps 8K60Hz 100W PowerDelivery M/M 0.8m / 2.62ft
- QIG, Quick Installation Guide

Please update: your drivers to support these resolutions/refresh rates.

Please make sure: The USB Type-C or Thunderbolt™ 4 Cable is capable of handling 40 Gbps to support 8K30Hz or 4K120Hz (in case you will not be using the included CAC-1571 cable).



The maximum cable length allowed(according to the respective specifications) here is for:

- Thunderbolt™ 4 max. 2m / 6.56 ft
- and
- USB4™ max. 0.8m / 2.62ft

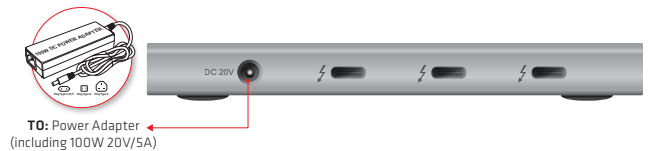
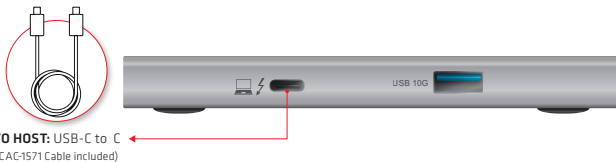


1. Use the **CAC-1571** USB4™ Type-C Cable to connect the **CSV-1580** to your host device (*Windows10™ or above version supported Thunderbolt™ 4 host / MacOS™11 or above version supported Thunderbolt™ 3 host*)
2. Use the Power Adapter to connect the CSV-1580 to a wall socket.

3. Connect your devices to the **CSV-1580** with cables that support the Device specification to get the most out of the connection / data / video / power. (*Some devices may need a driver / firmware update to get the highest/best performance*)

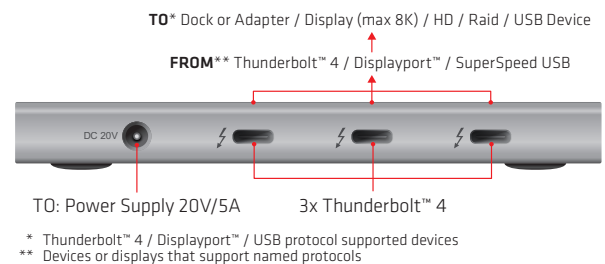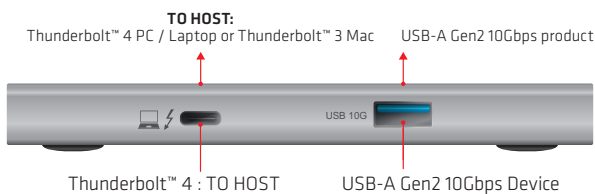

4. See below some examples of devices that can be connected to the **CSV-1580** (*Some devices may need a driver / firmware update to get the highest/best performance*)

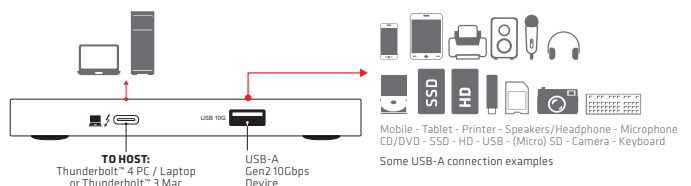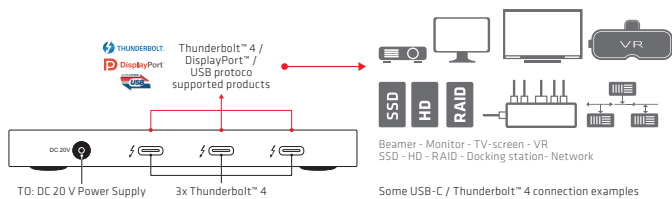

Warning Safe Usage: Only to be used at altitude 2000 meters/6562 feet and below.

